

COMBITHERM®

CTC10-20E

ELECTRIC BOILER-FREE



CAPACITY

- Eleven (11) full-size sheet pans or twenty-two (22) full-size hotel pans or GN 1/1 pans; two rows deep
- Two (2) side racks with eleven (11) non-tilt support rails; 19-7/8" (505mm) horizontal width between rails, 2-3/4" (70mm) vertical spacing between rails

CONSTRUCTION

- Stainless steel exterior, bright annealed interior
- Seamless welded interior stainless steel cavity
- CoolTouch3™ triple pane window door with hinged inner glass prevents additional heat loss and increases cooking efficiency
- Door is hinged right with a 130° swing
- High efficiency LED lighting integrated in the door
- Door mounted self-draining drip tray
- Hands free positive catch door handle with lighted visual alerts [PATENT PENDING]
- PROrinse™ ergonomic retractable hand shower includes a safety shutoff interlock that shuts off water to the hose [PATENT PENDING] and a built-in back flow preventer
- SafeVent™ provides automatic steam venting at the end of the cooking cycle [PATENT #7,282,674]
- Zero Clearance system maximizes floor space utilization with features that carefully protect temperature sensitive components and controls [PATENT PENDING]
- Adjustable stainless steel legs provide stability

CT CLASSIC™ STANDARD FEATURES

- Oven with state-of-the-art innovative solutions that meld together perfectly to deliver high performance standards, consistent food quality, and production efficiency.
- Classic control provides a simple and intuitive push button operation that commands all the oven functions with icons that are easy to identify.

- LED display indicates cooking mode, temperature settings, time remaining, and various instructions.
- Three cooking modes:
Steam - 85°F to 250°F (30°C to 120°C)
Convection - 85°F to 575°F (30°C to 300°C)
Combination - 212°F to 575°F (100°C to 300°C)
- Cook time is displayed in hours : minutes.

- Two different fan speeds expands cooking capabilities for products affected by a high velocity of air movement.
- Cool down feature provides the operator with the ability to lower the temperature of the oven compartment at an accelerated pace.
- CombiClean® fully automated cleaning with one heavy-duty cleaning cycle.

SHORT FORM SPEC

Provide Alto-Shaam Combitherm® CT Classic™ countertop model CTC10-20E boiler-free electric CombiOven designed with EcoSmart® technology for reduced energy and water consumption. Includes operational modes for steam, convection, and a combination of steam and convection heat. Oven is to be constructed of 18 gauge stainless steel interior cavity. Oven includes an attached retractable hand shower spray hose with safety shutoff interlock system and a

back flow preventer. Classic control includes a cool-down function, automatic cleaning function, fan with two (2) fan speeds. Oven includes four (4) adjustable stainless steel legs. Each oven is to accommodate up to eleven (11) full-size sheet pans or twenty-two (22) full-size hotel pans (GN 1/1), include standard right-hand door hinging, eleven (11) non-tilt support rails, and five (5) stainless steel shelves.

FACTORY INSTALLED OPTIONS

Electrical Choices

- 208-240V 3ph 380-415V 3ph
 440-480V 3ph

Door Swing

- Right-hand Door Hinging, standard
 Recessed Door, optional; increases oven width by 5" (127mm) (NOT AVAILABLE WITH COMBIHOOD PLUS™ VENTLESS HOOD)

- CombiHood PLUS™ Ventless Hood (NOT AVAILABLE ON STACKED COMBINATIONS OR UNITS WITH RECESSED DOOR)

- Extended One-year Warranty

- CombiLatch™ door interlock with adjustable timer safeguards operators from heat and steam in the oven cavity when opening the door during a cooking cycle

Installation Options (CHOOSE ONLY ONE)


- Alto-Shaam Combitherm Factory Authorized Installation Program - AVAILABLE IN THE U.S. AND CANADA ONLY
 Installation Start-Up Check - AVAILABLE THROUGH AN ALTO-SHAAM AUTHORIZED SERVICE AGENCY

Probe Choices

- Removable, single-point, quick-connect core temperature probe, optional
 Removable, single-point, quick-connect sous vide temperature probe, optional

Security Devices for correctional facility use

- Optional base package (NOT AVAILABLE WITH RECESSED DOOR): Includes tamper-proof screw package, excludes temperature probe
 Anti-entrapment device, optional
 Control panel security cover, optional
 Hasp door lock (PADLOCK NOT INCLUDED), optional
 Removable, single-point, quick-connect core temperature probe, optional
 Seismic feet package, optional

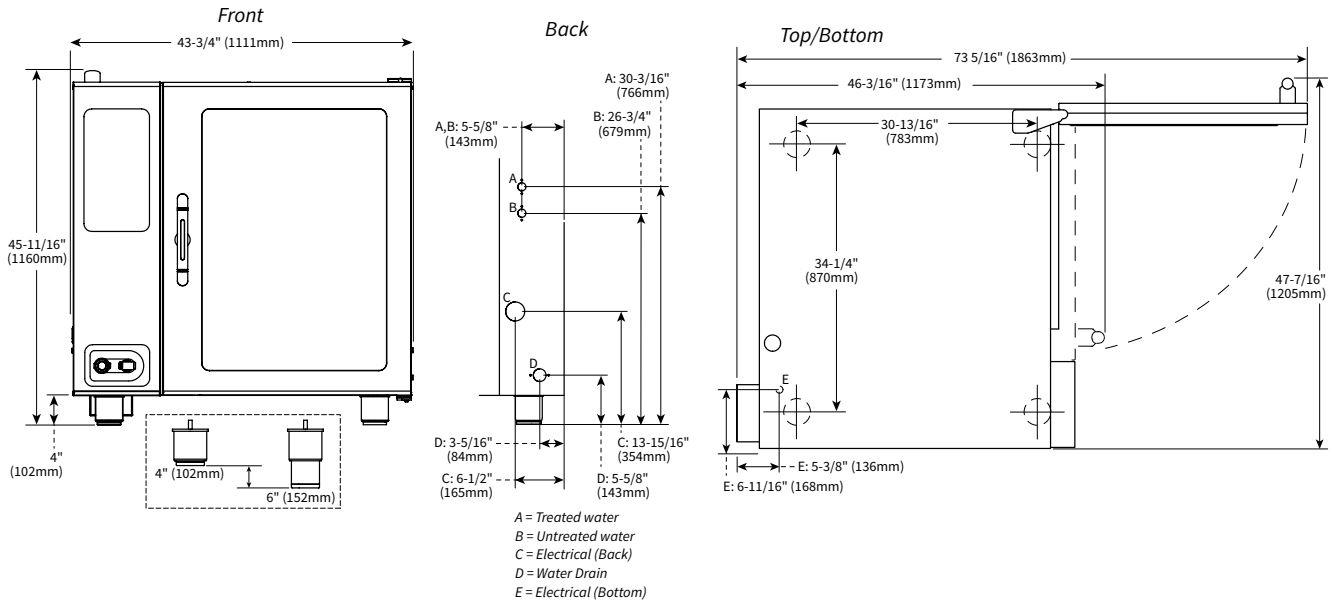

DIMENSIONS: H x W x D
EXTERIOR: 45-11/16" x 43-3/4" x 46-3/16" (1160mm x 1111mm x 1173mm)
EXTERIOR WITH RECESSED DOOR: 45-11/16" x 48-3/4" x 46-3/16" (1160mm x 1238mm x 1173mm)
INTERIOR: 31-1/2" x 24-1/4" x 32-3/4" (800mm x 616mm x 832mm)

WATER REQUIREMENTS	WATER QUALITY STANDARDS														
<p>TWO (2) COLD WATER INLETS - DRINKING QUALITY*</p> <p>ONE (1) TREATED WATER INLET: 3/4" NPT connection. Line pressure 30 psi minimum dynamic and 90 psi maximum static (200 to 600 kPa) at a minimum flow rate of 0.53 gpm (2 L/min).</p> <p>ONE (1) UNTREATED WATER INLET: 3/4" NPT connection. Line pressure 30 psi minimum dynamic and 90 psi maximum static (200 to 600 kPa) at a minimum flow rate of 2.64 gpm (10 L/min).</p> <p>* Both inlets can be from same source. Divide using a manifold. Run one side through treatment device before running to oven. Must meet line pressure and flow rate specifications for both inlets.</p> <p>WATER DRAIN: 1-1/2" (40mm) connection with a vertical vent to extend above the exhaust vent. materials must withstand temperatures up to 200°F (93°C).</p>	<p>It is the sole responsibility of the owner/operator/purchaser of this equipment to verify that the incoming water supply is comprehensively tested and if required, a means of "water treatment" provided that would meet compliance requirements with the published water quality standards shown below. Non-compliance with these minimum standards will potentially damage this equipment and/or components and void the original equipment manufacturer's warranty. Alto-Shaam recommends using OptiPure® (www.optipurewater.com) products to properly treat your water.</p> <table border="1"> <thead> <tr> <th>Contaminant</th> <th>Inlet Water Requirements</th> </tr> </thead> <tbody> <tr> <td>Free Chlorine</td> <td>Less than 0.1 ppm (mg/L)</td> </tr> <tr> <td>Hardness</td> <td>30-70 ppm</td> </tr> <tr> <td>Chloride</td> <td>Less than 30 ppm (mg/L)</td> </tr> <tr> <td>pH</td> <td>7.0 to 8.5</td> </tr> <tr> <td>Silica</td> <td>Less than 12 ppm (mg/L)</td> </tr> <tr> <td>Total Dissolved Solids (tds)</td> <td>Treated line: 50-125 ppm Untreated line: 50-360 ppm</td> </tr> </tbody> </table>	Contaminant	Inlet Water Requirements	Free Chlorine	Less than 0.1 ppm (mg/L)	Hardness	30-70 ppm	Chloride	Less than 30 ppm (mg/L)	pH	7.0 to 8.5	Silica	Less than 12 ppm (mg/L)	Total Dissolved Solids (tds)	Treated line: 50-125 ppm Untreated line: 50-360 ppm
Contaminant		Inlet Water Requirements													
Free Chlorine	Less than 0.1 ppm (mg/L)														
Hardness	30-70 ppm														
Chloride	Less than 30 ppm (mg/L)														
pH	7.0 to 8.5														
Silica	Less than 12 ppm (mg/L)														
Total Dissolved Solids (tds)	Treated line: 50-125 ppm Untreated line: 50-360 ppm														
<p>CLEARANCE REQUIREMENTS</p> <table border="1"> <tr> <td>LEFT:</td> <td>0" (0mm)</td> <td>18" (457mm) recommended service access</td> </tr> <tr> <td>RIGHT:</td> <td>0" (0mm) Non-combustible surfaces</td> <td>2" (51mm) door swing or combustible surfaces</td> </tr> <tr> <td>TOP:</td> <td colspan="2">20" (508mm) for air movement</td> </tr> <tr> <td>BOTTOM:</td> <td colspan="2">5-1/8" (130mm) for legs, air aintake</td> </tr> <tr> <td>BACK:</td> <td>4" (102mm)</td> <td>4-5/16" (109mm) optional plumbing kit</td> </tr> </table> <p>INSTALLATION REQUIREMENTS</p> <ul style="list-style-type: none"> Oven must be installed level. Hood installation is required. Water supply shut-off valve and back-flow preventer when required by local code. 	LEFT:	0" (0mm)	18" (457mm) recommended service access	RIGHT:	0" (0mm) Non-combustible surfaces	2" (51mm) door swing or combustible surfaces	TOP:	20" (508mm) for air movement		BOTTOM:	5-1/8" (130mm) for legs, air aintake		BACK:	4" (102mm)	4-5/16" (109mm) optional plumbing kit
LEFT:	0" (0mm)	18" (457mm) recommended service access													
RIGHT:	0" (0mm) Non-combustible surfaces	2" (51mm) door swing or combustible surfaces													
TOP:	20" (508mm) for air movement														
BOTTOM:	5-1/8" (130mm) for legs, air aintake														
BACK:	4" (102mm)	4-5/16" (109mm) optional plumbing kit													

ELECTRICAL (NO CORD, NO PLUG, DEDICATED CIRCUIT REQUIRED)								
MODEL	VOLTAGE	PH	HZ	AMPS	kW	BREAKER	AWG	CONNECTION
CTC10-20E	208 – 240	3	50/60	68.8 – 79.4	24.8 – 33.0	70-80	2 – 1	L1, L2, L3, G
	380 – 415	3	50/60	42.1 – 45.8	28.2 – 33.0	63	4 – 3	L1, L2, L3, N, G
	440 – 480	3*	50/60	36.4 – 39.7	28.3 – 33.0	40	6 – 4	L1, L2, L3, G

*ELECTRICAL SERVICE CHARGE APPLIES

WEIGHT	SHIP DIMENSIONS	PAN CAPACITY
NET 760 lbs est 345 kg	(L x W x H) 56" x 49" x 65"*	FULL-SIZE: 20" x 12" x 2-1/2"
SHIP 805 lbs* 365 kg*	(1422 x 1245 x 1651mm)*	GN 1/1: 530 x 325 x 65mm
*DOMESTIC GROUND SHIPPING INFORMATION. CONTACT FACTORY FOR EXPORT WEIGHT AND DIMENSIONS.		GN 2/1: 650 x 530 x 65mm
		**FULL-SIZE SHEET: 18" x 26" x 1"

PRODUCT MAXIMUM: 240 lb (109 kg)
VOLUME MAXIMUM: 150 quarts (190 liters)
**ON WIRE SHELVES ONLY. ADDITIONAL WIRE SHELVES REQUIRED FOR MAXIMUM CAPACITY