

HFM-24
HFM-30
HFM-48
HFM-72
Hot Food Module



HFM-72



• Halo Heat . . . a controlled, uniform heat source that radiates a gentle heat from the shelf base.

- Front-of-the-house use with an existing counter, overhead lighting, and sneeze guard system, or drop into a prep table for hot food plating convenience.
- A more upscale presentation of food items either on trays or on the solid display surface directly (the use of flat bottom surface platters or food containers is recommended).
- Easy drop-in installation design.
- Stainless steel exterior surfaces and flange.
- Requires solid surface insert material (provided by customer).

Exterior side panels of 18 gauge stainless steel. An on/off thermostat control is attached to the heated base with a 30" (762mm) flexible, water-tight extension for built-in installations and can be mounted in a convenient location for the operator. The hot food module is controlled by one (1) on/off switch and one (1) adjustable thermostat with a range of 1 through 10 with one (1) indicator light. Solid surface material insert (customer supplied) provides even heat transfer to hot foods being held in direct contact with the heated surface.

HFM-24 - 24" (610mm) wide

HFM-30 - 30" (762mm) wide

HFM-48 - 48" (1219mm) wide

HFM-72 - 72" (1829mm) wide



Factory Installed Options

• Voltage Choices

208V

230V




W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.
 Phone: 262.251.3800 800.558.8744 U.S.A./CANADA Fax: 262.251.7067 800.329.8744 U.S.A. only
www.alto-shaam.com



HFM-24, HFM-30, HFM-48, HFM-72

Hot Food Module

HFM SERIES SIDE VIEW

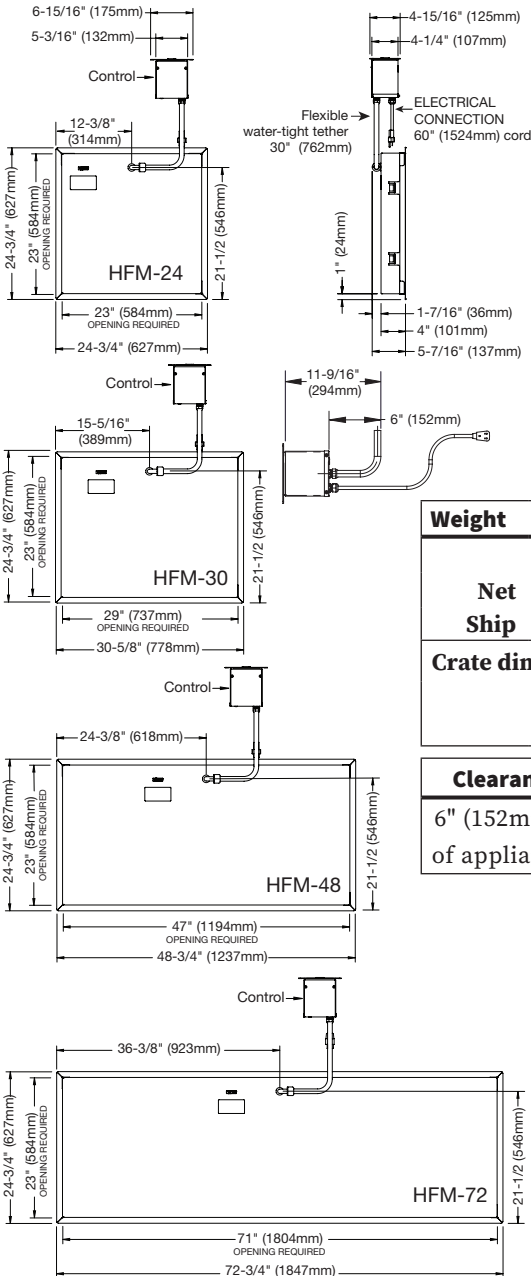

Dimensions: L x W x D	
HFM-24	Exterior: 24-3/4" x 24-3/4" x 5-7/16" (627mm x 627mm x 137mm) Surface material: 22-3/8" x 22-3/8" x 3/4" (568mm x 568mm x 19mm) Opening required (L x W): 23" x 23" (584mm x 584mm)
HFM-30	Exterior: 30-5/8" x 24-3/4" x 5-7/16" (778mm x 627mm x 137mm) Surface material: 28-3/8" x 22-3/8" x 3/4" (721mm x 569mm x 19mm) Opening required (L x W): 29" x 23" (737mm x 584mm)
HFM-48	Exterior: 48-3/4" x 24-3/4" x 5-7/16" (1237mm x 627mm x 137mm) Surface material: 46-3/8" x 22-3/8" x 3/4" (1178mm x 569mm x 19mm) Opening required (L x W): 47" x 23" (1194mm x 584mm)
HFM-72	Exterior: 72-3/4" x 24-3/4" x 5-7/16" (1847mm x 627mm x 137mm) Surface material: 70-3/8" x 22-3/8" x 3/4" (1788mm x 569mm x 19mm) Opening required (L x W): 71" x 23" (1803mm x 584mm)
Control box cutout required: 4-1/2" x 5-1/2" x 11-9/16" (115mm x 140mm x 294mm)	

Weight				
	HFM-24	HFM-30	HFM-48	HFM-72
Net	39 lb (18 kg)	53 lb (24 kg)	60 lb (27 kg)	88 lb (40 kg)
Ship	104 lb (47 kg)	118 lb (54 kg)	130 lb (59 kg)	175 lb (79 kg)
Crate dimensions: (L x W x H)				
	36" X 36" X 17" (914 X 914 X 432mm)	36" X 36" X 17" (914 X 914 X 432mm)	60" X 34" X 13" (1524 X 864 X 330mm)	79" X 34" X 13" (2007 X 864 X 330mm)

Clearance requirements
6" (152mm) from bottom of appliance.

Electrical						
HFM-24						
V	Ph	Hz	A	kW		
208	1	60	3.2	0.65		NEMA 6-15P 15A, 250V plug
230	1	50/60	3.4	0.78		CEE 7/7* Plug rated 250V
HFM-30						
V	Ph	Hz	A	kW		
208	1	60	2.8	0.62		NEMA 6-15P 15A, 250V plug
230	1	50/60	3.4	0.83		CEE 7/7* Plug rated 250V
HFM-48						
V	Ph	Hz	A	kW		
208	1	60	6.4	1.3		NEMA 6-15P 15A, 250V plug
230	1	50/60	7.1	1.6		CEE 7/7* Plug rated 250V
HFM-72						
V	Ph	Hz	A	kW		
208	1	60	9.7	1.99		NEMA 6-15P 15A, 250V plug
230	1	50/60	10.6	2.4		CEE 7/7* Plug rated 250V
*Additional 230V plugs available						
	CH2-16P Plug rated 250V				BS1363 Plug rated 250V	

Installation requirements

- Unit must be installed level.
- It must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.
- Required solid surface material must be rated to withstand temperatures of 300°F (148°C). Material must be 3/4" (19mm) thickness, 3/8" (10mm) radius corners and 1/8" (3mm) top and bottom edge. Edges must be polished. Contact Alto-Shaam for additional information.

Accessories

Cutting Board (for placement on top of surface material) BA-2054
24" (610mm) H x 18" (470mm) W x 1/2" (13mm) D



W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.
Phone: 262.251.3800 800.558.8744 U.S.A./Canada Fax: 262.251.7067 800.329.8744 U.S.A. only
www.alto-shaam.com