

Reach-in QuickChiller™ QCI-60

CE Certified



Protect and serve your food and your customers. QuickChiller blast chiller systems are designed to rapidly and uniformly decrease the temperature of hot foods while providing additional food safety and production efficiency.

Increased production and greater pan capacity.

Reduce daily production times by producing food up to five days in advance, and simply rethermalize and refresh foods based upon demand.

Safely and rapidly chill or freeze hot foods to proper holding temperatures with hard and soft chill programming options.

Reliable and accurate temperature control provided by Microprocessor controls.

Easy-to-clean with profile door handle design.



CAPACITY

QCI-60:

- Chill capacity by cycle: 60 kg
- Freeze capacity by cycle: 25 kg
- Gross capacity: 280 L
- Wire shelves: GN 1/1 (not included)
- Max. number of shelves: 13
- Shelf spacing: 75mm



CHECK FIRST

- The appliance must be installed level.
- The appliance must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.
- Appliance is not intended for built-in installation.



CLEARANCE

- Top: 50mm**
- Left: 50mm**
- Right: 50mm**
- Front: 50mm**
- Back: 50mm**



REFRIGERATION

Refrigerant charge (g)	1800
Compressor	Hermetic
Evaporator	Air-ventilated
Refrigerant	R452A
Condenser	Air
Acoustic pressure at 1 meter (dba)	60
Heat emission (Watts/cycle)	10250
Chill energy consumption (KW/kg)	0.021
Freeze energy consumption (KW/kg)	0.083




TEMPERATURE

Max. Ambient	+43°C
Temperature Performance	+70°C to +3°C in 90 min +70°C to -18°C in 270 min

Reach-in QuickChiller™

CE Certified

Specification

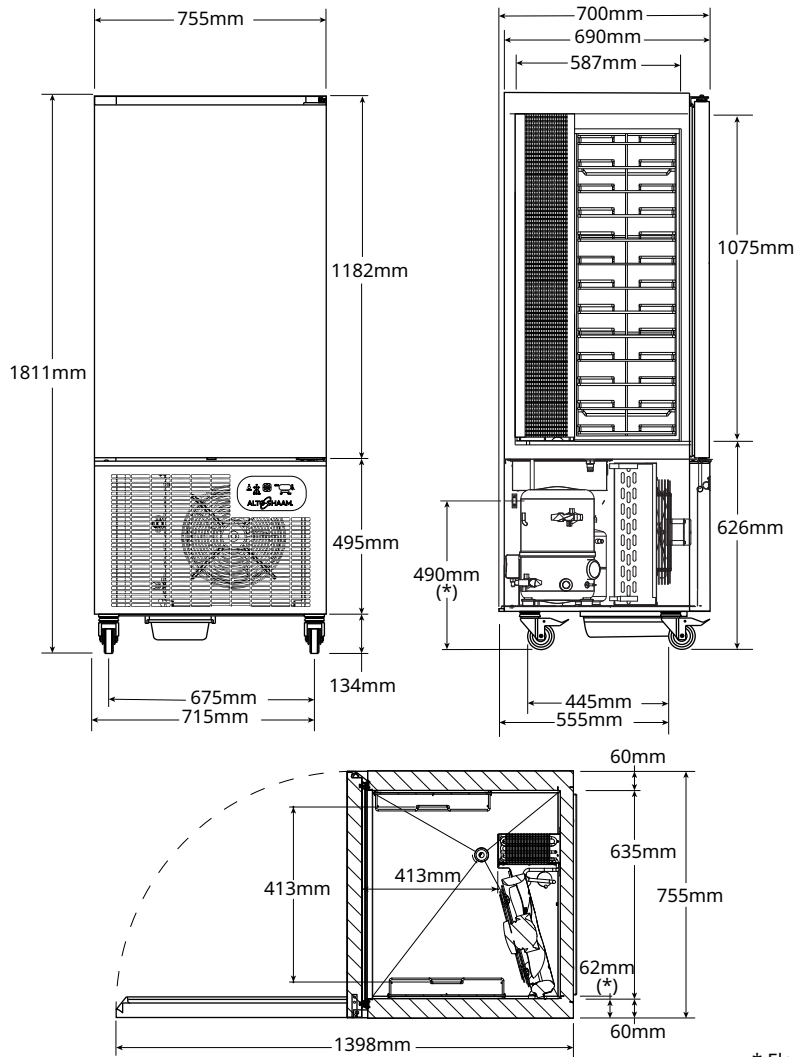

* Electrical cable



DIMENSIONS

Model QCI-60

Exterior (H x W x D) 1811mm x 755mm x 700mm

Interior (H x W x D) 1075mm x 635mm x 413mm

Cabinet Height 1075mm

Net Weight 165 kg

Ship Dimensions (L x W x H)* 860mm x 820mm x 2000mm

Ship Weight* 175 kg

*Domestic ground shipping information.
Contact factory for export weight and dimensions.



ELECTRIC

V 230

Ph 1

Hz 50/60

A 16

W 2500

Plug Configuration European P17 16A plug and cord

*Electrical connections must meet all applicable codes.



IP X4

CONTACT US

W164 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.

Phone: 262.251.3800 | 800.558.8744 U.S.A./Canada | Fax: 262.251.7067 | alto-shaam.com